

Product Data Sheet

Neo Armor™ 2-007-B11

Light Weight Work Glove, Nitrile Foam Finish Coated, Machine Knitted Cut Level B/A2, with Thumb Crotch Reinforcement



Gauge	18gg
Liner	HPPE, Glass, Polyester, Nylon & Spandex
Liner Colours	Melange Green
Dipping Coverage	Palm Coated
Coating	Nitrile foam finish
Coating Colour	Black

Features:

- Unique Nitrile micro-foam finish provides excellent dry, wet and oil grip performance.
- 360 degree breathable coating keeps hand cool and comfortable.
- Ergonomically design for superiorior fit, feel and comfort.
- Excellent abrasion resistance allows long term use and better durability.
- Oeko Tex standard certified and Sanitized(TM) treated.
- Complies with REACH directives and uses Azo-free dye.

Applicable Industries

- Automotive
- Cleaning & Janitorial
- Glass Handling
- Mining, Oil & Gas
- Steel & Metal

Glove Type

- General Handling Gloves
- Cut Resistant Gloves
- Abrasion Resistant Gloves


Hazard

- Abrasion
- Cut

Lalan Rubbers (Pvt) Ltd, 95B, Zone A, Export Processing Zone, Biyagama, Malwana, Sri Lanka
+94(0)11 4311 240 | www.lalanrubbers.com

Certifications

CE Category ii Certificate
EN 420:2003+A1:2009
EN 388:2016 (4X43B)
FDA 21 CRF
EN 388 reading ACTP TDM (B)
ASTM F2992 - 15 (ANSI A2)
EN 407 : 2004 (X1XXXXX)

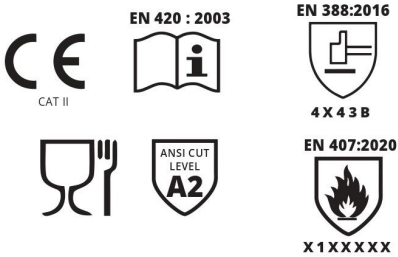

Dimensions / Weight

		XXS/6	S/7	M/8	L/9	XL/10	XXL/11
A	Total Glove Length (mm) (±10)	2 2 0	2 3 0	2 4 0	2 5 0	2 6 0	2 7 0
B	Wrist Length (mm) (±5)	7 0	7 5	7 5	8 0	8 5	8 5
C	Wrist width (mm) (±5)	7 5	7 5	8 0	8 0	8 5	9 0
D	Palm width (mm) (±5)	8 5	9 0	9 5	1 0 0	1 0 5	1 1 0
	Over lock Color	B l u e	R e d	G r e e n	W h i t e	Y e l l o w	B l a c k
	Glove Weight/Pair (g) (±6)	3 4	3 8	4 2	4 4	4 8	5 2
	Gross Weight/Pack (g)	4 5 8	5 0 6	5 5 4	5 7 8	6 2 6	6 7 4
	Net Weight/Pack (g)	4 0 8	4 5 6	5 0 4	5 2 8	5 7 6	6 2 4

Packaging

Description	Each glove comes with a heat transfer Label Sticker and a Care label. 12 Pairs with a Sleeve Pack is packed in a Poly Bag with a User Instruction Sheet (UIS)
Pairs Per Pack	12 Pairs
Pack Dimensions	260mm x 160mm x 120mm